

ANY JOB. ANY SIZE. ANY PLACE.

M-03




The **M-03** pump is an economical direct-drive, self-priming, triple diaphragm pump with 1hp. TEFC 120/240v 60hz motor (14 amp), designed for general purpose spraying by the entry level contractor as well as the professional contractor.

The **MP-20** pump is a high quality, double belt-driven, self-priming, twin diaphragm pump with 1hp. TEFC 120/240v 60hz motor (14 amp), offers easy, reliable operation, making this pump ideal for the professional contractor.

Included:

- Pressure gauge and shut-off valve fittings for input discharge and bypass recirculation hoses
- Units are mounted on a steel base with a convenient carrying handle and are easily cleaned by running water through the system for a few minutes immediately after use.

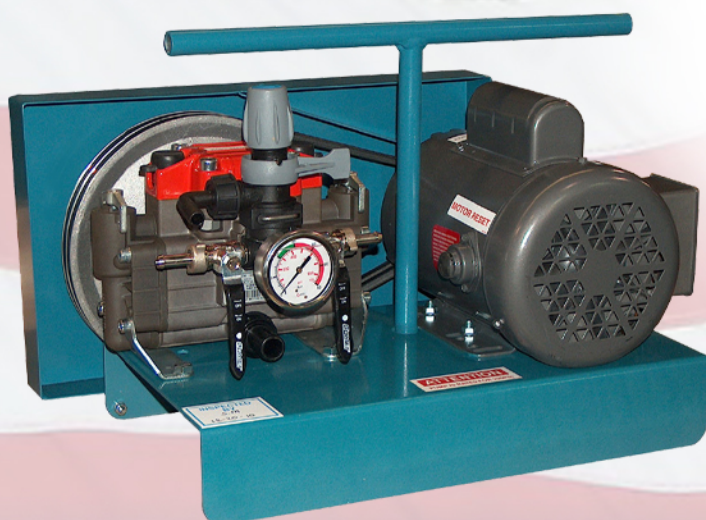

MP-20
Belt Driven

AMERICAN MADE.

Backed by a manufacturer's 2-YEAR WARRANTY

M-03 SPECIFICATIONS

Maximum Flow:	3gpm	Diaphragm:	Triple semi-hydraulic
Maximum Pressure:	300 psi	Weight:	69lbs (31.3kg)
Maximum Speed:	1725 rpm	Dimensions	19.25" x 13.5" x 11"

Port Size	Pump Only	Pump w/Control Assembly	QD Coupler
Inlet	1/2" NPT	3/4" hose barb	3/4"
Outlet	3/8" NPT	3/8" hose barb	3/8"
Bypass	---	1/2" hose barb	1/2"

MP-20 SPECIFICATIONS

Maximum Flow:	5.7gpm	Diaphragm:	Dual semi-hydraulic
Maximum Pressure:	200 psi	Weight:	82lbs (37.2kg)
Maximum Speed:	550 rpm	Dimensions	22.25" x 13.5" x 15.75"

Port Size	Pump Only	Pump w/Control Assembly
Inlet	3/4" NPT	7/8" hose barb
Outlet	3/8" NPT	3/8" hose barb
Bypass	1/2" NPT	1/2" hose barb

ADDITIONAL ACCESSORY OPTIONS AVAILABLE UPON REQUEST

Note: Manufacturer's product brand, density and variable blowing conditions will affect production rate.